


Model	1252-2.5T
Height	1335mm
Width	307mm
Volume	84.8Litre

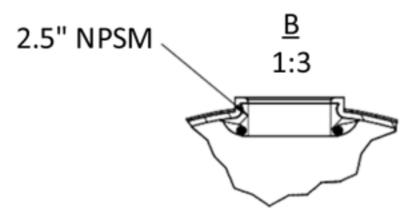

NOTES:

- 1. Inner shell Polyethylene (PE) seamless one-piece tank liner
- 2. Outer shell Continuous strands of fiber-glass with high strength epoxy resin
- 3. Bottom base FRP reinforced tripod base
- 4. Opening 2.5 inch thread opening
- 5. Tanks meet all applicable specification of NSF/ANSI 044 standard
- 6. Operating Specifications:

Maximum Working Pressure: 150 PSI (1.0MPA)

Temperature:1-49 C (34-120 F) Maximum Vacuum:127mm Hg(5"Hg)

7. Liner inspection

No more than 20 internal 、external blemishes、burnt debris No internal 、external blemishes、burnt debris larger than 5 *5 mm

- 8. Surface finish
- 9. Surface to be free of resin, glass,nicks,barbed filament
- 10. Tank to be bonded to base
- 11. The base to be level correction
- 12. Top and bottom opening to be parallel,top opening to be parallel with the base