

SPECIFICATIONS

WFA Vanity Inline Water Filter System

K-T-VANITY

Now offers improved sediment and limescale reduction.

Proprietary filter head technology: **filter cartridge warranted to fit and compatible with all existing WFA installations.**



AS3497

Lic.WMKA22045
IAPMO R&T OCEANA



ANSI/NSF STANDARDS
42 AND 53



MADE IN
USA



ASSEMBLED IN
AUSTRALIA

WaterFilters
AUSTRALIA

WFA Vanity Inline Water Filter System

K-T-VANITY

SPECIFICATIONS

| | |
|--------------------------------------|---|
| Service life/change cartridge | 12 months* |
| Working Pressure | 10–175psi (70–1200 kPa) |
| Temperature | 2–38°C |
| Height to allow for cartridge change | 335mm |
| Width of filter head/cartridge | 225mm |
| Flow Rate | up to 8 litres per minute |
| Burst pressure | exceeds 3,500 kPa as tested by CSIRO |
| Warranty | 10 years |

*Service life will vary according to flow rate, influent line pressure and local water conditions.

INCLUSIONS

- WFA Filter Head with Mounting Bracket
- WFA Vanity Cartridge
- Mounting Screws
- Dual Check Valve
- Pex Hose 550mm 1/2" female to 3/8" male
- Brass Hex Nipple 3/8" male to 1/2" male
- Filter Monitor Alarm
- Plumbing Tape
- Owners Manual

PERFORMANCE

Certified to remove/reduce:


- Sediment
- Chlorine
- Bad taste and odours
- Limescale

CARTRIDGE RE-ORDER CODE

C-T-VANITY

To find out more call us on 02 9905 6211
Or if you prefer, you can email us at sales@wfa.com.au

VERTICAL OR HORIZONTAL INSTALLATION

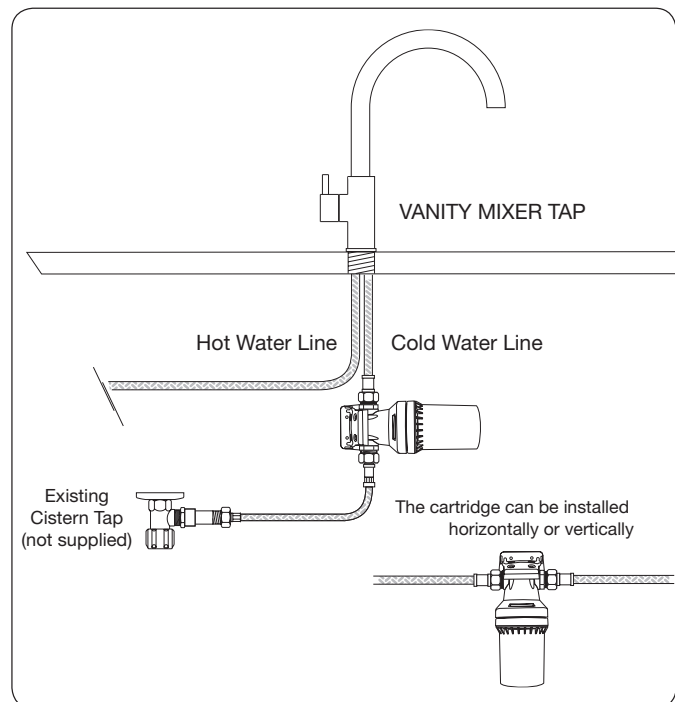

WaterFilters
AUSTRALIA